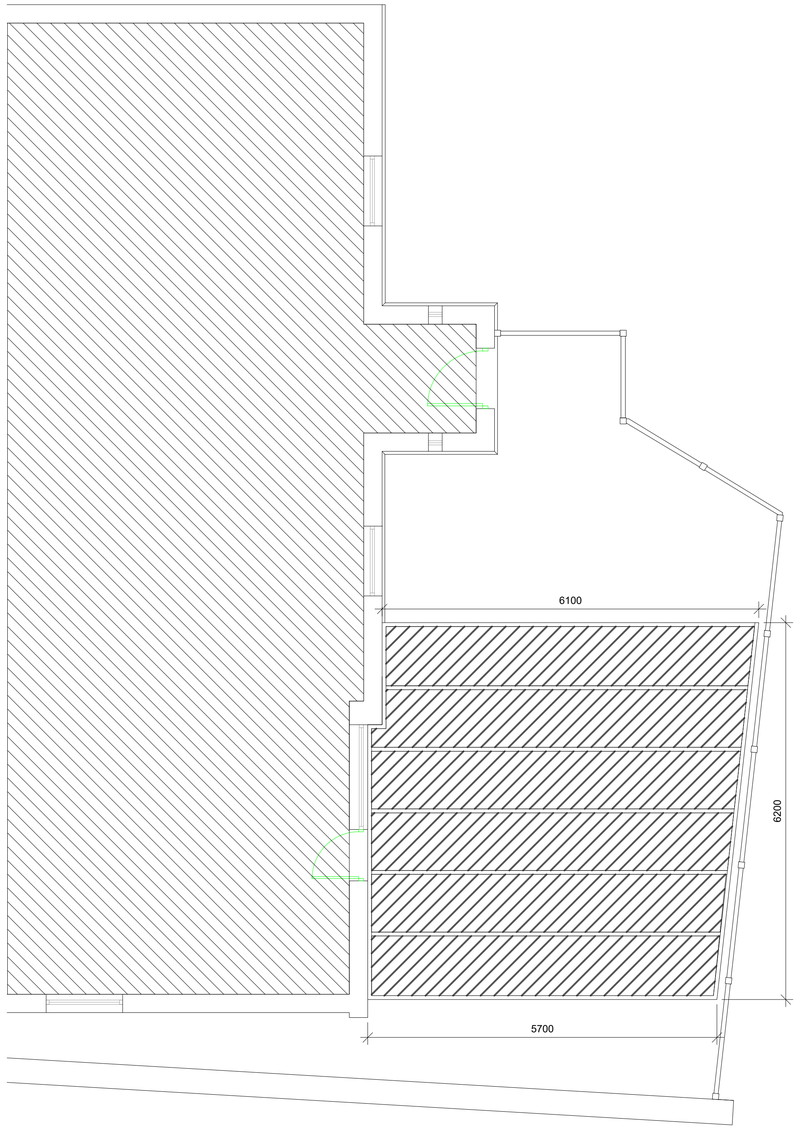

1 Proposed Floor Plan
1:50

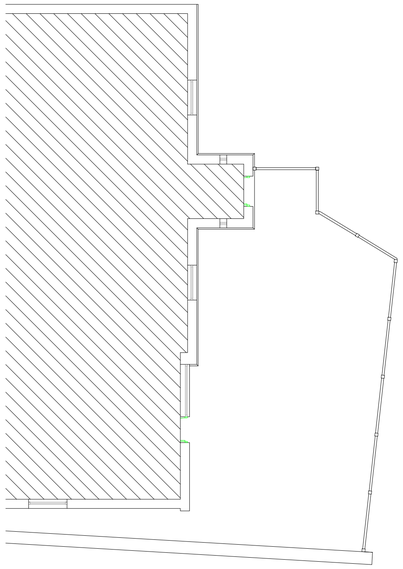

2 Existing Floor Plan
1:100

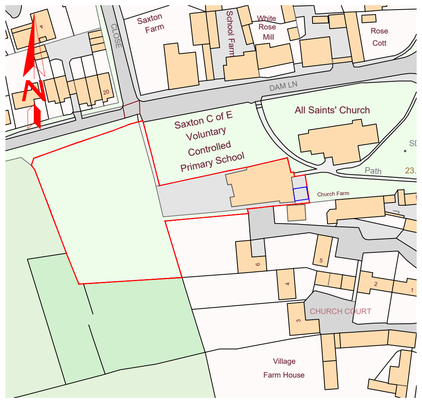

3 Site Location
1:1250

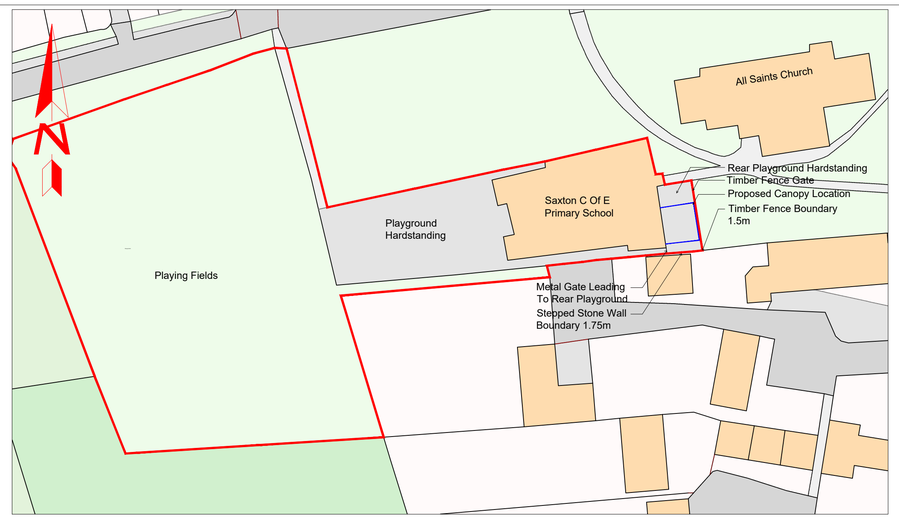

4 Proposed Block Plan
1:500

5 Proposed Visuals
NTS

Description of the main contract works:

Job type:	Supply & Installed
Description of structure:	CE Marked to BS-EN 1090-1 Free standing mono-pitch canopy, with tapered run at the front following the fence line (one side longer than the other)
Structure material & colour:	Aluminium polyester powder coated to a standard RAL colour
Squared or circular posts:	5 No squared
Roof glazing system:	Multi-Link-Panel Non-Fragile system
Roof glazing material:	16mm clear or opal multiwall polycarbonate
Guttering type:	Aluminium
Water butt:	1 No, 210L
Closure trims:	Included to ridge and 1 side
Structural calculations:	Yes
Groundworks:	5 No 750mm3 foundation pots, made good with tarmac
Size of structure:	5.7m Structure Run Length x From 5.7m to 6.15m (tapered) Projection

Scale Bar 1:1250



Scale Bar 1:500



Scale Bar 1:100

Scale Bar 1:50

COPYWRIGHT OF EDDISONS COMMERCIAL LTD ALL RIGHTS RESERVED. DRAWING NOT TO BE REPRODUCED WITHOUT EXPRESS PERMISSION.
DO NOT SCALE FROM DRAWING EXCEPT FOR THE PURPOSE OF PLANNING AND ALL DIMENSIONS TO BE CHECKED ON SITE

KEY:

Rev:	Date:	Description:	App:

Eddisons
Building & Project Consultancy
Toronto Square, Toronto Street,
Leeds LS1 2HJ
Tel: 0113 243 0101
Email: buildingconsultancy@eddisons.com

PROJECT TITLE:
Saxton Church Of England Primary School
Dam Ln, Saxton, Tadcaster
LS24 9QF
Sheet 1 of 2

CLIENT:
Saxton Church Of England Primary School

DRAWING TITLE:
Proposed Canopy Design

DRAWN: ML | CHECKED: | APPROVED:

DATE: OCT_21 | SCALE:

DRAWING STATUS: CLIENT_ISSUE

DRAWING No: | REVISION: